

ATOSA USA, INC.

Toll Free: 855-855-0399 Email: info@atosausa.com www.atosa.com | www.atosausa.com California, Colorado, Florida, Georgia, Illinois, New Jersey, Ohio, Texas, Washington

MODELS:

MBF8020GR

Dual-Temp Refrigerator & Freezer

Standard Features

- Stainless steel exterior & interior
- Refrigerator on top / freezer on bottom
- · Electronic Temperature Controller
- Refrigerator maintains temperatures between 35°F – 38°F
- Freezer maintains temperatures between
 -8°F 0°F
- LED interior light(s)
- Recessed door handle(s)
- Door lock(s) standard
- Magnetic door gasket(s) standard for positive door seal
- Pre-installed casters & shelves
- Down duct refrigeration to ensure even distribution of air



For the best results of food preservation we recommend setting your refrigerator between 35°F to 38 °F, freezer between -8°F to 0°F

- 1. Don't forget to leave the unit some room to breathe!
- 2. Please clean the condenser frequently to give the unit more fresh air.

2 YEAR PARTS AND LABOR WARRANTY















ATOSA USA, INC.


Toll Free: 855-855-0399 Email: info@atosausa.com www.atosa.com | www.atosausa.com

California, Colorado, Florida, Georgia, Illinois, New Jersey, Ohio, Texas, Washington

SPECIFICATIONS

Models	Door	Capacity (Cu.Ft.)	Shelves	Casters (inch)	Rated Current (A)	Voltage (V/Hz/Ph)	НР	Refrigerant	Exterior Dimensions (inch)	Net Weight (lb)	Gross Weight (lb)
MBF8020GR	2	21.4	2	4	4.4	115/60/1	Top: 1/7 Bottom: 1/2	R290	28 ^{3/4} ×33 ^{3/4} ×81 ^{1/4}	255	332

PLAN VIEW

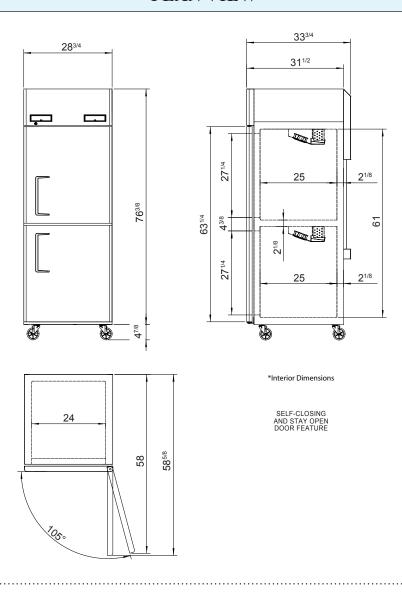

Casters Epoxy shelves Door lock Down duct Temperature control

